

REGISTRATION DATA

WESTERN ELECTRIC 5780 MAGNETRON

DESCRIPTION

The 5780 is an integral magnet type tunable magnetron intended for service as a pulsed oscillator capable of operating over a frequency range of 8500 to 9600 megacycles per second. The peak power output is approximately 250 kilowatts and the tube is forced air-cooled.

GENERAL ELECTRICAL DATA

| | |
|---|-----------------|
| Pre-heat Heater Voltage | 20 volts |
| Pre-heat Heater Current (at 20 volts) | 4 ± 0.4 amperes |
| Minimum Pre-heat Time | 180 secs |
| Heater Cold Resistance | 0.5 ohms |
| Anode-Cathode Capacitance | 14 ± 1.5 μf |

MAXIMUM RATINGS, Absolute Values

| | |
|---|--------------|
| Heater Voltage | 22 volts |
| Heater Current | 4.5 amperes |
| Heater Surge Current | 16.0 amperes |
| Peak Anode Voltage | 40 kv |
| Peak Anode Current | 36 amperes |
| Average Power Input | 600 watts |
| Duty Cycle | .001 |
| Pulse Duration | 0.30 usec. |
| Rate of Rise of Anode Voltage | 300 kv/usec. |
| Anode Temperature | 100°C |

GENERAL MECHANICAL DATA

| | |
|--|---|
| Mounting Position | May be mounted in any position - see 4 hole mounting plate in Fig. 1. |
| Net Weight | 16 pounds |
| Cooling Data | |
| To limit rise in body temperature to 50°C for a dissipation of 450 watts | 20 cfm |
| Coupling Between Tube and Load | Waveguide Choke |
| Input Connection | See Footnote A |
| Output Connection | See Footnote B |

The output section is coupled to RG-51/U waveguide by means of a standard waveguide flange.

Note A: The coaxial cathode input connector shall utilize a heater shunt capacitor in close proximity to the cathode input terminal so as to minimize voltage surges which could damage the heater. See Figure 1.

Note B: A connection has been provided to the "arc quencher" wire, by means of a standard grid cap. When wired into the appropriate voltage supply and relay circuitry an arc across the output window, caused by RF voltage breakdown in the waveguide load, can be extinguished by automatically turning off the applied pulse voltage momentarily. The effect of the quencher is to protect the output window from "suck in" when such an arc is permitted to run.

TYPICAL OPERATING CONDITIONS

| | |
|---------------------------------------|-----------------|
| Frequency | 8500 to 9600 Mc |
| Peak Anode Voltage | |
| At 8500 Mc | 33 ± 1 KV |
| At 9600 Mc | 35 ± 1 KV |
| Pulling Factor (VSWR 1.5/1) | 16 Mc |

TYPICAL OPERATION

| # | <u>Ef</u> V | <u>If</u> A | <u>Ib</u> mA | <u>epy</u> kv | <u>Pi</u> W | <u>Du</u> | <u>tp</u> u sec. | <u>rrv</u> kv/μs |
|----|----------------|----------------|-----------------|------------------|----------------|-----------|---------------------|---------------------|
| 1. | 13.0 | 3.1 | 9.5 | 36 | 340 | .00033 | 0.24 | 200 |
| 2. | 14.5 | 3.4 | 4.9 | 36 | 175 | .00020 | 0.20 | 210 |
| 3. | 11.0 | 2.3 | 14.5 | 36 | 520 | .00072 | 0.18 | 160 |

The data on lines #1, #2 and #3, shown under "Typical Operation" caption, each constitute a satisfactory set of simultaneous operating conditions. Fig. 2 shows typical satisfactory pulse shapes for these, observed when using a Line Type Modulator.

OPERATING DATA

These data are embodied in the following set of figures. A family of curves are shown which represent the spread in range of the tube as manufactured. Data involving VSWR have been carried beyond the 1.5 test value for information purposes only.

Figure 3 This is a plot of required filament current and anode cooling air versus applied average anode power input.

These data were taken under single and simple multiple pulse conditions and it is anticipated that some deviation may occur when complex multiple group pulse conditions are employed.

Figure 4 This is a plot of tuning dial reading versus frequency. It is assumed that thermal equilibrium has been obtained at each of the calibrated points.

Figure 5 This is a plot of both applied peak anode voltage and overall operating efficiency versus peak anode current. The recommended operating range of voltage, current, and efficiency are indicated as a guide within which satisfactory operation is expected. These data were taken at 9100 mc. For lower frequencies the spread will decrease, for high frequencies the spread will increase.

Figure 6 This is a plot of percent of power output change from matched load conditions one can obtain by varying the phase of a 1.5 and a 2 VSWR from sink to anti-sink.

The nominal match curve is obtained relative to the frequency tuning band by equating the output at each frequency point against the power output at 8500 mc. Therefore the change due to load mismatch and phase is that difference between the nominal line and the appropriate sink or anti-sink line at any associated frequency point.

Figure 7 This is a plot of frequency pulling relative to VSWR and represents the greatest variations wherever encountered in the full frequency tuning band.

Figure 8 This is a plot of "phase of sink" vs frequency.



Figure 9 This is a plot of long line relationships vs line length for the specific case of 16 mc pulling which is the 5780 maximum specification limit.

TYPICAL 5780 PULSES



ANODE VOLTAGE

ANODE CURRENT

TYPICAL OPERATION #1

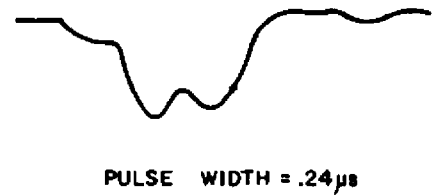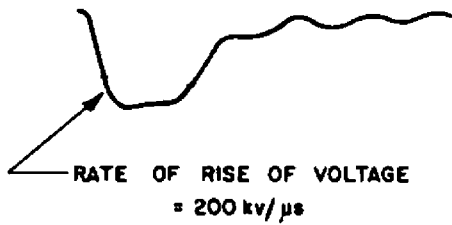

TYPICAL OPERATION #2

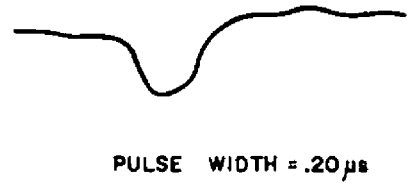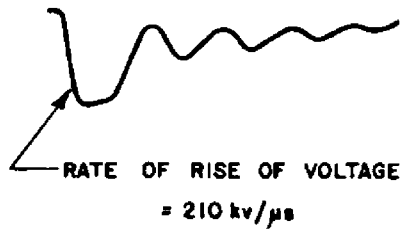

TYPICAL OPERATION #3

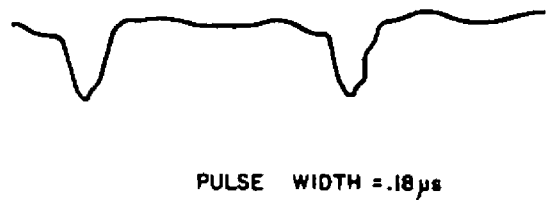
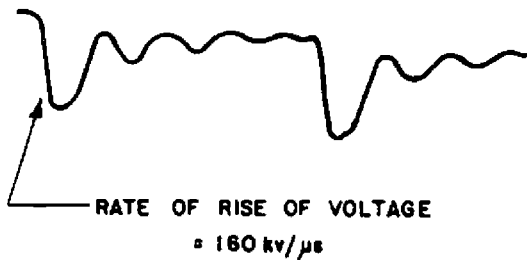


FIG. 2

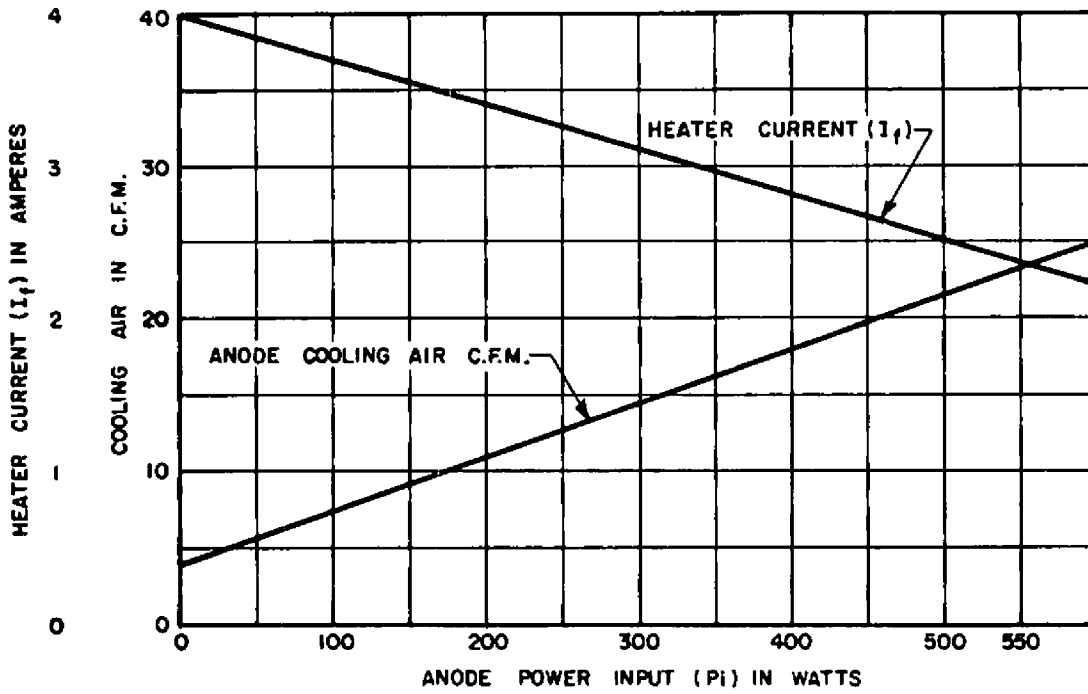


FIG. 3

NOTE: The air cooling information plotted in Figure 3 above is based on a maximum rise in magnetron body temperature of 50°C above a maximum ambient of 50°C with an anode dissipation of 450 watts.

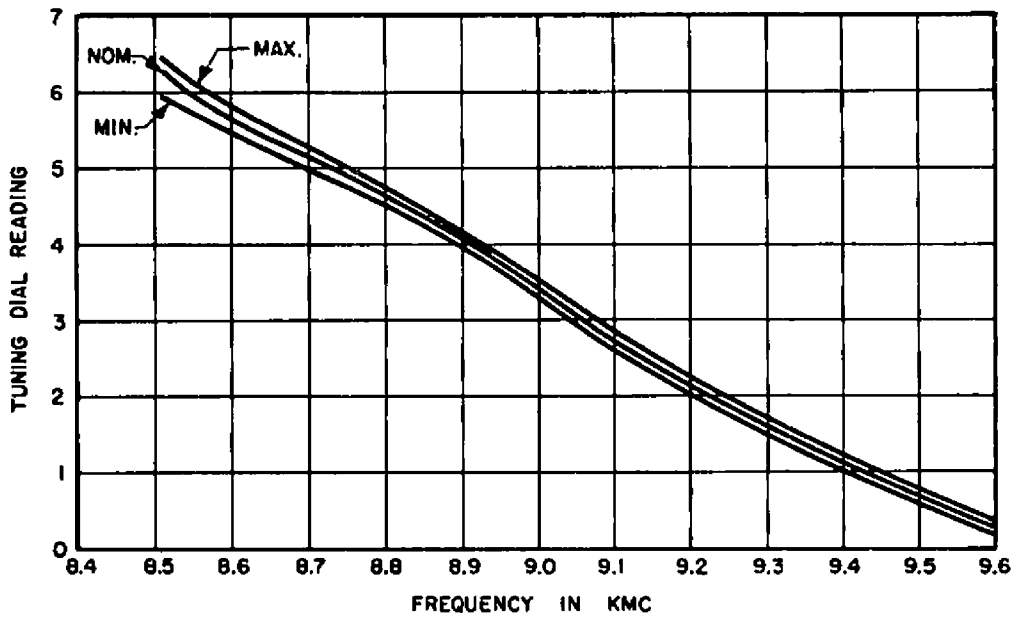


FIG. 4

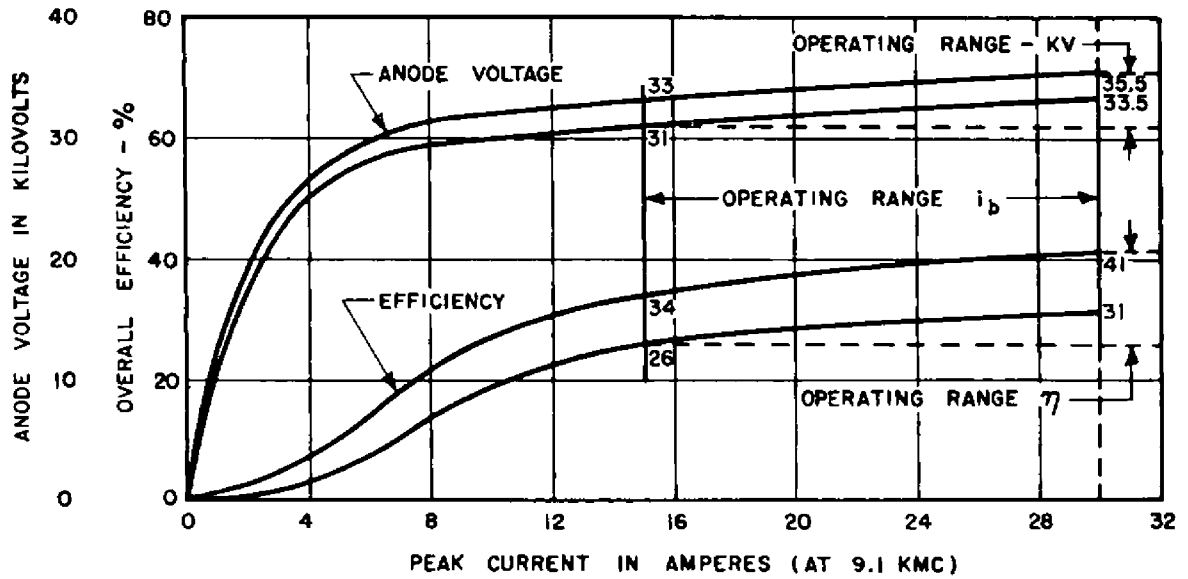


FIG. 5

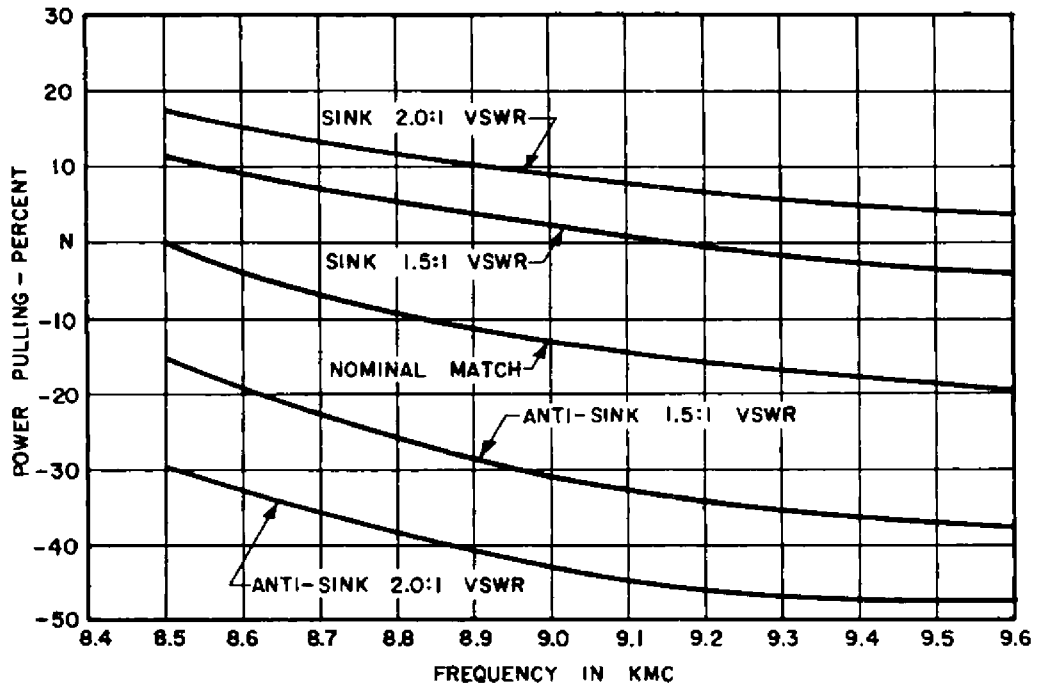


FIG. 6

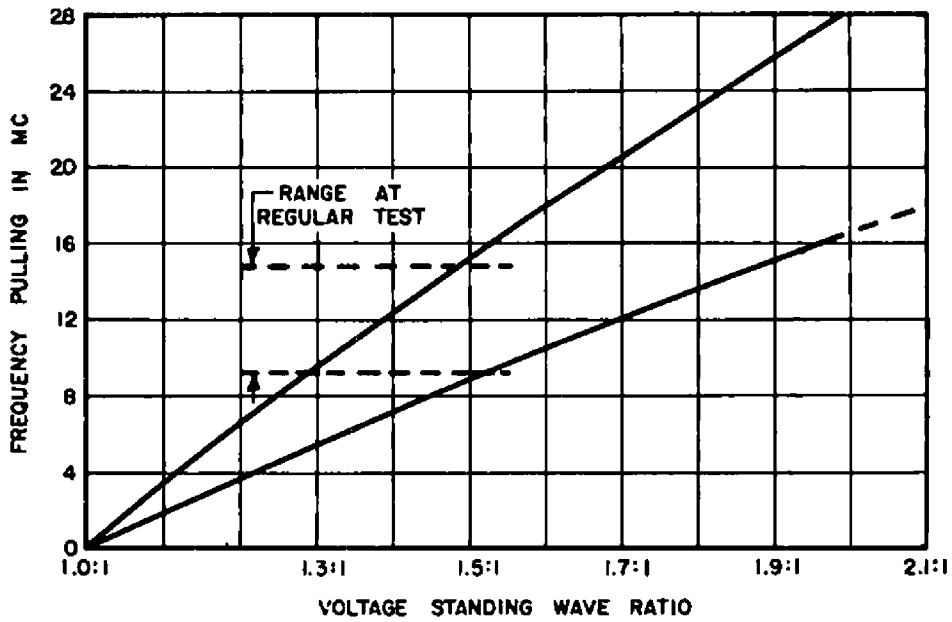


FIG. 7

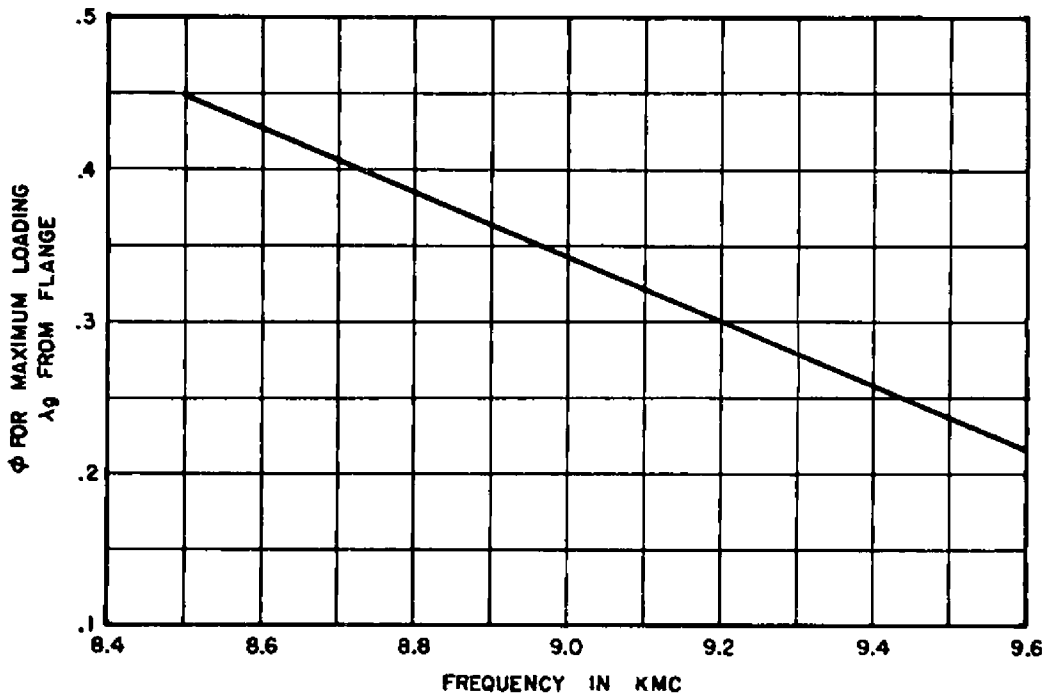


FIG. 8

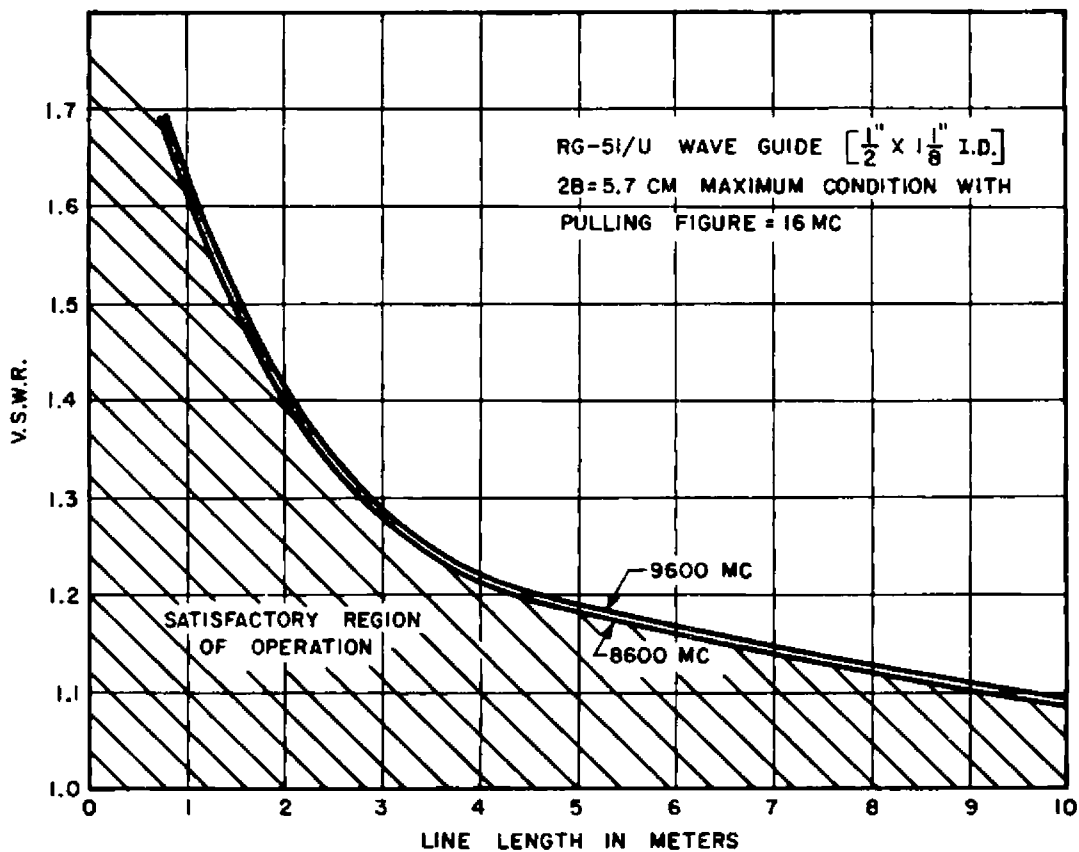


FIG. 9